



Breathe Pure, Live Healthier!



Pure MASTER
G23P INVERTER

HEALTHY FEATURES



Smart Self-Cleaning



Healthy Filter (3 in 1)

COLASMA

Purification Technology



CONNECT WITH WIFI



3D AIRFLOW



PCB MULTILAYER COATINGS



LONG DISTANCE AIR SUPPLY



EASY INSTALLATION



ANTI-CORROSION PROTECTION



WIDE VOLTAGE RANGE



QUIET OPERATION



FAST COOLING



7 FAN SPEEDS



iFEEL

GREE MALAYSIA SDN BHD (1132718-M)

HQ / SARAWAK

Address: No.1, Lorong Pedada 16,
96000 Sibu, Sarawak, Malaysia.
Tel: +6084-353 588
Fax: +6084-348 588
Email: sarawak@greemalaysia.com.my

SABAH

Address: Ground Floor, Wisma KTS, Jalan Pantai,
88000 Kota Kinabalu, Sabah, Malaysia.
Tel: +6088-214 588
Fax: +6088-213 588
Email: sabah@greemalaysia.com.my

WM - CENTRAL

Address: 2, Jalan SS13/4, Subang Jaya Industrial Estate,
47500 Subang Jaya, Selangor, Malaysia.
Tel: +603-5635 3588
Fax: +603-5613 4477
Email: wm@greemalaysia.com.my

WM - NORTHERN

Address: 160A, Jalan Seang Tek,
10400 Georgetown, Pulau Pinang.
Tel: +604-228 0190
Email: penang@greemalaysia.com.my

* ONLY FOR INVERTER MODEL




HEALTHY FEATURES




Multi-Functional Air Filtration System

For Fresher And Healthier Air




1. Silver Ion Filter

Silver ions can kill **95%** of germs by releasing positive chemicals that break apart the germs. It can eliminate tiny particles such as spores, viruses, things that commonly cause allergies and bacteria.




2. Catechin Filter

Catechin is extracted from green tea. It can effectively eliminate **95%** of carcinogenic agents, such as staphylococcus, streptococcus, salmonella, etc.



3. Biology Sterilization Filter

The inhibition rate of Staphylococcus aureus and Escherichia coli was **≥95%** (24 hours).

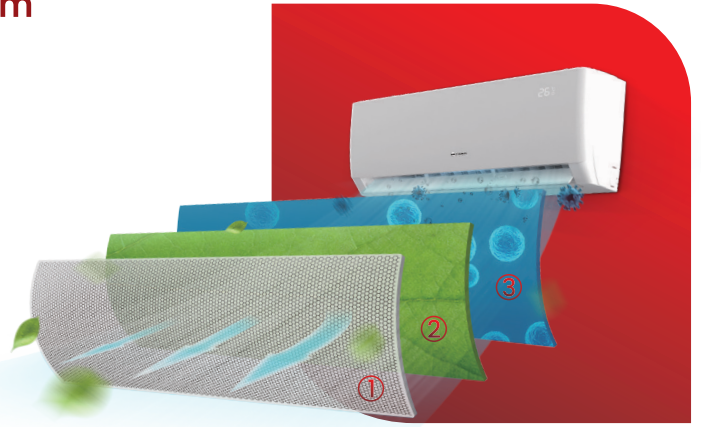

COLASMA Purification Technology

Ionizer

Enhanced Feature for Pristine Air Quality



Release colasma



Bacteria and viruses caught by colasma



Colasma reacts with bacteria and viruses



Turn into water




Smart Self Cleaning

Cleaner Air, Effortlessly Maintained

Prevents growth of harmful microorganisms by eliminating the moisture inside of the indoor unit in 4 steps:




Condensation



Frosting & Sterilization



Defrosting



Drying



Strong Anti-corrosion Protection

Preserving Air Quality By Long Lasting Durability

1. Golden Fin

2. Hydrophilic Layer

3. Anticorrosive Layer

4. Aluminium

5. Anticorrosive Layer

6. Hydrophilic Layer

SERIES NAME			PURE MASTER (INVERTER)			
			G23P(INVERTER)			
MODEL			GWC09AGCXB-K6DNA2B	GWC12AGCXB-K6DNA2C	GWC18AGEXB-K6DNA2A	GWC24AGEXF-K6DNA2H
STAR RATING			4 STARS	4 STARS	4 STARS	5 STARS
COOLING CAPACITY	RATED	btu / h	9,724	12,000	18,000	24,000
	MIN ~ MAX	btu / h	(1,706 - 12,624)	(2,730 - 12,966)	(4,094 - 19,790)	(5,800 - 27,300)
EFFICIENCY	EER	W / W	3.90	3.57	3.52	3.61
ANNUAL POWER CONSUMPTION	AS PER ENERGY SAVING LABEL	kWh (UNITS)	1,026	1,169	1,780	2,371
AIR CIRCULATION	INDOOR (H/M/L)	m ³ / h	680 / 440 / 340	680 / 490 / 390	1,300 / 900 / 750	1,250 / 950 / 700
		CFM	400.18 / 258.94 / 200	400 / 288 / 230	765 / 530 / 441	736 / 559 / 412
NOISE LEVEL	INDOOR (H/M/L)	db (A)	53 / 43 / 36	50 / 43 / 34	55 / 47 / 40	60 / 41 / 43
	OUTDOOR	db (A)	59	61	62	68
ELECTRICAL						
POWER SUPPLY	PHASE/VOLTAGE/FREQUENCY	Φ / V / Hz	1Ph / 220-240V / 50			
POWER INPUT	COOLING (RATED)	W	730 (1,100)	985 (1,260)	1,500 (2,200)	1,950 (2,700)
POWER CURRENT	COOLING (RATED)	A	3.40 (5.00)	4.55 (5.93)	7.00 (11.00)	9.00 (12.40)
REFRIGERANT						
CHARGE	OUTDOOR	KG / OZ	0.39/13.8	0.6/21.2	0.7/24.7	1.3/45.9
	LIQUID	mm (INCH)	φ6 (1/4")	φ6 (1/4")	φ6 (1/4")	φ6 (1/4")
PIPE DIAMETER	GAS	mm (INCH)	φ9.52 (3/8")	φ9.52 (3/8")	φ12 (1/2")	φ12 (1/2")A
	PIPING [MAX (H) , MAX (L)]	m	10 , 15	10 , 20	10 , 25	10 , 25
SIZE & DIMENSION						
OUTLINE DIMENSION	INDOOR	W x H x D (mm)	825 x 293 x 196	825 x 293 x 196	1,075 x 333 x 246	1,075 x 333 x 246
	OUTDOOR		732 x 550 x 330	732 x 555 x 330	732 x 550 x 330	958 x 660 x 402
PACKAGE DIMENSION	INDOOR	W x H x D (mm)	893 x 374 x 283	893 x 374 x 283	1,149 x 423 x 346	1,149 x 423 x 346
	INDOOR (H/M/L)		794 x 376 x 615	794 x 376 x 615	794 x 376 x 615	1,032 x 456 x 737
NET WEIGHT	INDOOR, OUTDOOR	KG	10.0 , 22.0	10.0 , 24.5	17.0 , 24.0	17.0 , 41.0